


R 915 Compact Litronic

LIEBHERR

Crawler excavator

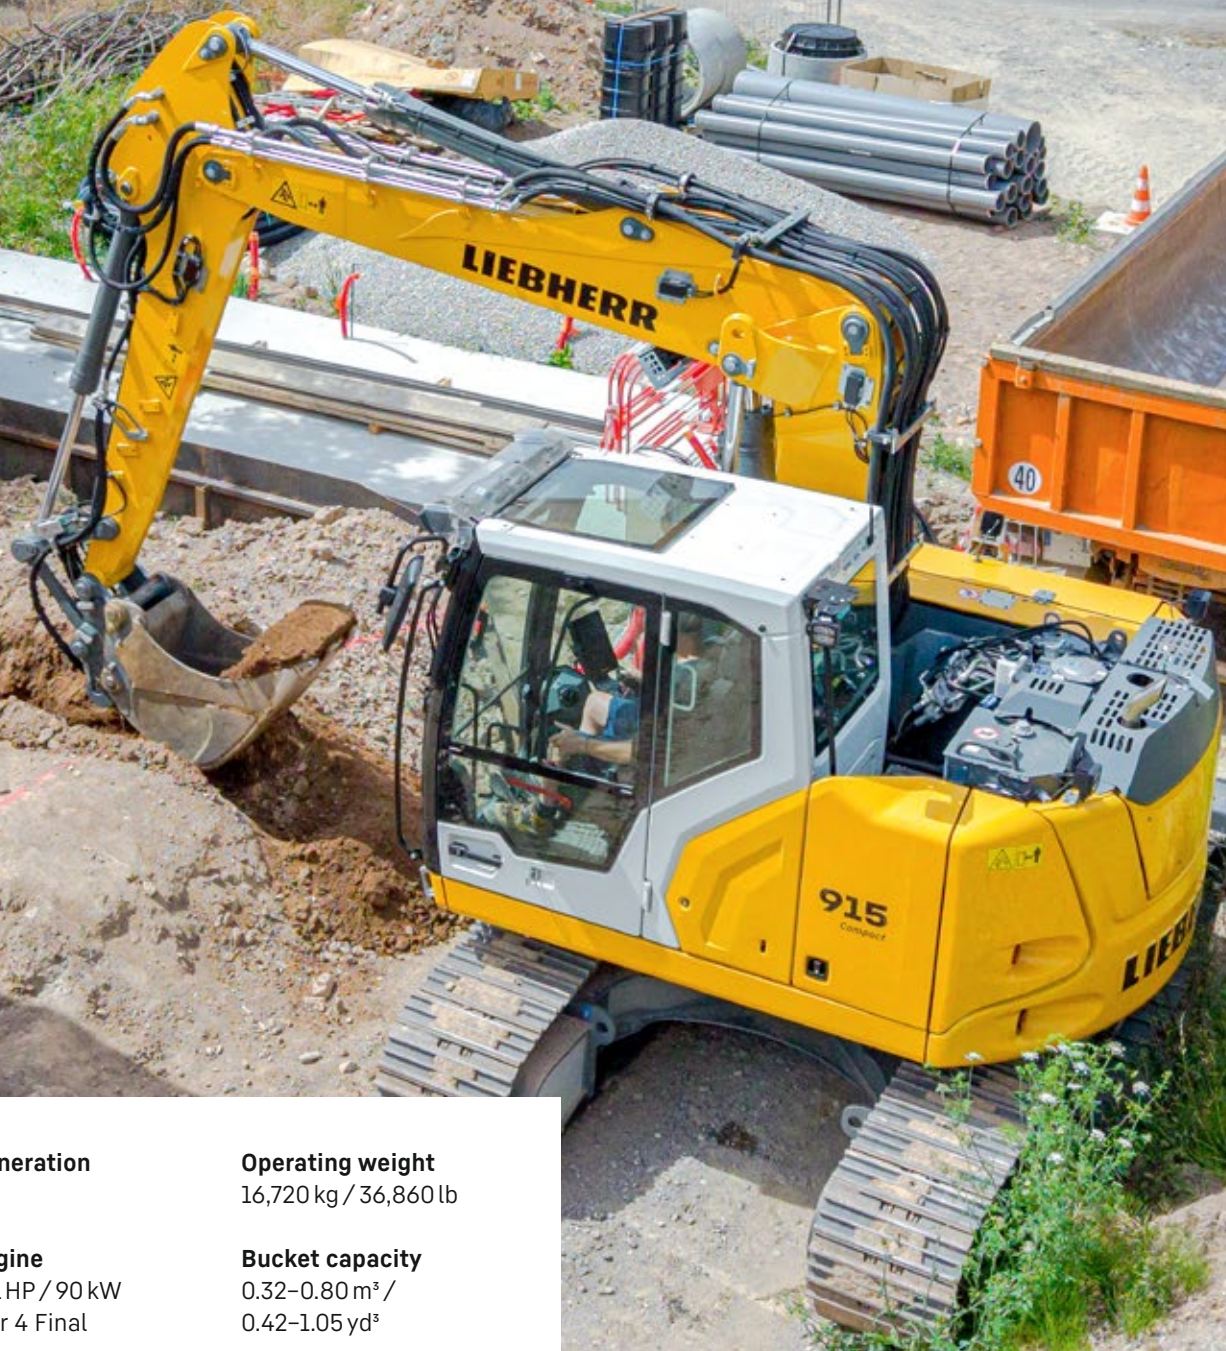

Generation

8

Operating weight

16,720 kg / 36,860 lb

Engine

121 HP / 90 kW

Tier 4 Final

Bucket capacity

0.32–0.80 m³ /

0.42–1.05 yd³

Compact, versatile, connected

R 915 Compact

① Maintenance

- Servicing concept, with service points accessible from ground level
- Engine oil level and filling nozzle accessible from ground level

② Equipment

- Large choice of tools and teeth to suit all applications
- Longer lifespan of components and higher productivity thanks to automatic centralized lubrication system
- Safety check valves for hoist and stick cylinders
- Available height limitation, adjustable from the touchscreen

③ Safety

- Panoramic visibility with no obstructions and camera on the rear and the right side equipment for enhanced safety
- Liftable console for easy and safe access to cab
- ROPS-certified cab structure: rollover protection
- Emergency exit via the rear cab window
- Right window and windshield in laminated and tinted glass

④ Undercarriage

- Robust, reliable X-frame undercarriage, easy to secure thanks to its integrated eyelets
- Easy maintenance
- Several levelling blades available
- Optional rubber track pads for urban application
- Possibility to anchor the machine with the blade
- Maintenance-free travel gear and track rollers with lifetime lubrication
- Extra storage as an option

⑤ Compactness

- Short tail swing radius of 1,55 m / 5' 1" for increased safety and flexibility on work sites
- The perfect machine for narrow sites – ideal for urban applications and on motorways



⑥ Comfort

- Spacious, air-conditioned work space
- Airsprung seat with vertical and horizontal suspension
- Easy-to-use high resolution 10" color touchscreen
- 76 mm / 3" orange seat belt
- Groundbreaking, intuitive INTUSI human-machine interface

⑦ Engine

- US EPA Tier 4 Final engine with SCR system and diesel oxidation catalyst
- Automatic idle-stop

⑧ New technologies

- **Bucket Fill Assist (BFA)**
Automatic bucket-filling cycle for increased productivity, as standard with 500 machine hours included
- **Modetronic**
Customisable driving modes for optimized work cycles tailored to each type of application, as standard
- **Liebherr Connect**
Latest-generation telemetry system, as standard
- **MyLiebherr**
Series customer portal with numerous downloadable applications (subscription required)



Versatility and performance on site

A machine designed to do the job

Thanks to a perfectly balanced design and an extensive range of working attachments, Generation 8 Liebherr compact excavators can be used for a wide range of applications: earthmoving, road and utility services, municipal work, landscaping and light demolition. Their high degree of flexibility in terms of configuration ensures that each site can be optimized using a single machine.

Equipped with a wide range of booms, sticks and hydraulically operated attachments, they can be transformed into extremely versatile multi-purpose tool carriers. Result: optimized productivity and the ability for a single machine to replace several others on the site.



Performance that meets modern-day requirements

Designed to meet the growing productivity demands of modern job sites, Liebherr compact excavators combine powerful engines with optimized hydraulic performance to deliver fast, smooth and efficient working cycles.

Thanks to smooth combined movements and outstanding digging, travel and swing performance, they deliver consistently high productivity throughout the working day.



A response to the challenges of the compact market

When faced with increasingly complex job sites – greater urbanisation, restricted access and budgetary constraints – the compact excavators from Liebherr can handle any challenge with ease. Despite their compact size, they deliver high-level performance, perfectly suited to urban environments and confined spaces.

Designed to operate anywhere, even in the harshest conditions, they combine agility and power to maintain optimum efficiency. Result: rapid cycle times and optimized productivity on every site.



Operational efficiency and maximum productivity



Optimum dynamics for the job site

An excavator's effectiveness is measured by more than its specifications – it is defined by its ability to perform efficiently across a wide range of applications and job sites. Liebherr compact excavators are designed with an optimized working range that reduces the need for repositioning, helping operators work more efficiently.

Their reach and depth have been perfectly adapted to the challenges of the ground, facilitating loading operations while ensuring great precision. Result: fewer unnecessary movements, masterful execution and maximum productivity every day.

A machine that performs well in all conditions

Designed to deliver a high level of performance in all conditions, Liebherr compact excavators adapt to all types of ground. Their traction ensure safe movement, even on inclined surfaces or difficult terrain.

The optimized rotational torque makes all loading operations easier, while the load-bearing capacities meet the demands of even the most challenging applications. Result: constant and reliable productivity on all job sites.



Optimisation of the work cycles

The technologies incorporated in the Liebherr compact excavators make it possible to individually adapt the machine to user requirements and to optimize overall efficiency. The operating modes can be customized to tailor the performance for each application.

Energy optimisation plays a part in reducing fuel consumption for greater cost-effectiveness in day-to-day operations.

Reliability, availability and cost control

A design committed to sustainability

Designed for durability, Liebherr compact excavators tackle the challenges of even the most demanding sites. Their robust construction, together with components built to withstand heavy-duty use, guarantees outstanding reliability.

The blade has been engineered with an optimized profile and geometry to improve material clearance and grading performance. Manufactured from highly wear-resistant steel, it delivers exceptional durability while requiring virtually no maintenance. Proportional control via the mini-joystick or hand lever provides the precision needed for fine grading and accuracy-focused applications.



Simple maintenance for maximum availability

Productivity also goes hand in hand with maximum availability of the machine. Liebherr compact excavators are designed for ease of maintenance, with simple access to all maintenance points from the ground.

Fast and efficient maintenance operations help reduce downtime and optimize the period of operation. Result: more productive hours, less downtime and greater profitability every day.

Connectivity and intelligent machine management

Digital solutions from Liebherr can be used to manage and optimize the use of the machines in day-to-day operations. Thanks to the integrated telemetry, performance monitoring is simplified and all the data is accessible via a dedicated customer portal.

This transparency improves management of the fleet and helps optimize operating costs. Ready to integrate the support systems of the future, these machines perfectly embody a forward-looking approach.



The new emCAB operator's cab

The new operating system for a smarter job site

In today's construction industry, intuitive machine control is essential for maximising productivity and ease of use. INTUSI (Intuitive User Interface) integrates intelligent control logic with advanced machine learning capabilities, offering a highly customizable interface. This innovation significantly enhances operational efficiency and user comfort on the job site.



Ultra-ergonomic control with Liebherr joysticks

Central to the INTUSI experience are two joysticks designed and developed by Liebherr to the highest quality standards, ergonomically positioned on either side of the operator's seat. Designed for comfort at work, they offer a completely natural and very comfortable grip and reduce operator fatigue – even during extended shifts.

Intuitive operation thanks to uncluttered control units

A compact display to the right of the operator enables quick access to important functions. The optimized arrangement of the control elements on the right-hand console ensures intuitive operation and minimises fatigue. An operating system that adapts to your needs, not the other way around.



Technical data



Diesel engine

Rating	
per SAE J1349	121 HP (90 kW) at 1,800 rpm
per ISO 9249	122 HP (90 kW) at 1,800 rpm
Torque	550 Nm at 1,600 rpm / 406 lbf ft at 1,600 rpm
Model	Deutz TCD3.6L4
Type	4 cylinder in-line
Bore/Stroke	98/120 mm / 3.9/4.7 in
Displacement	3.6 l / 220 in³
Engine operation	4-stroke diesel Common-Rail injection system Turbo-charged and after-cooler Reduced emissions
Air cleaner	Dry-type air cleaner with pre-cleaner, primary and safety elements
Engine idling	Sensor controlled
Electrical system	
Voltage	24 V
Batteries	2 x 145 Ah / 12 V
Alternator	Three-phase current 28 V / 140 A
Tier 4 Final	
Harmful emissions values	In accordance with 40CFR1039 (EPA) / 13CCR (CARB)
Emission control	Deutz DOC + DPF + SCR technology
Fuel tank	169 l / 45 gal
Urea tank	20 l / 5 gal



Cooling system

Diesel engine	Water-cooled Compact cooling system comprising cooling unit for water, hydraulic oil and charge air with stepless, thermostatically controlled fan, retractable thermostatic fan for radiator cleaning
----------------------	---



Hydraulic controls

Power distribution	Via control valves with integrated safety valves, simultaneous and independent actuation of undercarriage, swing drive and equipment
Servo circuit	
Equipment and swing	With electro-hydraulic pilot control and proportional joystick levers
Travel	Electro-proportional via foot pedal
Additional functions	Via switch or electro-proportional foot pedals
Proportional control	Proportionally acting transmitters on the joysticks for additional hydraulic functions



Hydraulic system

Hydraulic pump	
For equipment and travel drive	Liebherr axial piston variable displacement pump
Max. flow	300 l/min. / 79 gpm
Max. pressure	350 bar / 5,076 psi
Hydraulic pump regulation and control	Liebherr-Synchron-Comfort-system (LSC) with electronic engine speed sensing regulation, pressure and flow compensation, torque controlled swing drive priority
Hydraulic tank	93.4 l / 24.6 gal
Hydraulic system	max. 230 l / max. 61 gal
Filtration	1 main return filter with integrated partial micro filtration (5 µm / 2,500 mesh)
MODE selection	Adjustment of engine and hydraulic performance via a mode pre-selector to match application, e.g. for especially economical and environmentally friendly operation or for maximum digging performance and heavy-duty jobs
S (Sensitive)	Mode for precision work and lifting through very sensitive movements
E (Eco)	Mode for especially economical and environmentally friendly operation
P (Power)	Mode for high performance with low fuel consumption
P* (Power-Plus)	Mode for highest performance and for very heavy duty applications, suitable for continuous operation
Engine speed and performance setting	Stepless adjustment of engine output and hydraulic power via engine speed
Additional function	Tool Control: 20 pre-adjustable pump flows and pressures for add-on attachments



Swing drive

Drive	Liebherr axial piston motor with integrated brake valve and torque control
Transmission	Liebherr compact planetary reduction gears
Swing ring	Liebherr, sealed race ball bearing swing ring, internal teeth
Swing speed	0-10.0 rpm stepless
Swing torque	54 kNm / 39,828 lbf ft
Holding brake	Wet multi-disc (spring applied, pressure released)
Additional function	Positioning swing brake automatic



Cab

Cab	ROPS safety cab structure (roll-over protection system) with individual windscreens or featuring a slide-in subpart under the ceiling, headlights integrated in the ceiling, a door with a sliding window, large stowing and depositing possibilities, shock-absorbing suspension, sound damping insulating, laminated safety glass, separate window shades for the sunroof window and windscreen
Operator's seat Comfort	Air cushioned operator's seat with 3D-adjustable armrests, headrest, lap belt, seat heater (2-stage), adjustable seat cushion inclination and length, lockable horizontal suspension, automatic weight adjustment, pneumatic low frequency suspension, adjustable suspension stiffness, pneumatic lumbar vertebrae support and passive seat climatization with active coal
Operator's seat Premium (Option)	In addition to operator's seat Comfort: active electronic weight adjustment (automatic readjustment) and active seat climatization with active coal and ventilator
Arm consoles	Joysticks with control consoles attached to the seat, folding left control console
Operation and displays	Large high-resolution operating unit, intuitive, color display with touchscreen, haptic feedback, video-compatible, numerous setting, control and monitoring options, e.g. air conditioning control, fuel consumption, machine and attachment parameters, separate display for rear view and side view monitoring
Air-conditioning	Automatic air-conditioning, recirculated air function, fast de-icing and demisting at the press of a button, air vents can be operated via a menu; recirculated air and fresh air filters can be easily replaced and are accessible from the outside; heating-cooling unit, designed for extreme outside temperatures, sensors for solar radiation, inside and outside temperatures (country-dependent)



Undercarriage

LC	Gauge 2,000 mm / 6'7"
Drive	Liebherr axial piston motor
Transmission	Liebherr compact planetary reduction gear
Maximum travel speed	3.1 km/h / 1.9 mph low range 6.9 km/h / 4.3 mph high range
Drawbar pull on crawler	151 kN / 33,950 lbf
Track components	B4, maintenance-free
Track rollers / Carrier rollers	7 / 2
Tracks	Sealed and greased
Track pads	Triple grouser
Holding brake	Wet multi-disc (spring applied, pressure released)
Brake valves	Integrated into travel motor
Lashing eyes	Integrated



Equipment


Type	High-strength steel plates at highly-stressed points for the toughest requirements. Complex and stable mountings of equipment and cylinders
Hydraulic cylinders	Liebherr cylinders with seal and guidance systems
Bearings	Sealed, low maintenance



Complete machine

Lubrication	Liebherr central lubrication system for uppercarriage and equipment
Noise emission	
ISO 6396	70 dB(A) = L _{pA} (inside cab)
2000/14/EC	101 dB(A) = L _{WA} (surround noise)

Dimensions

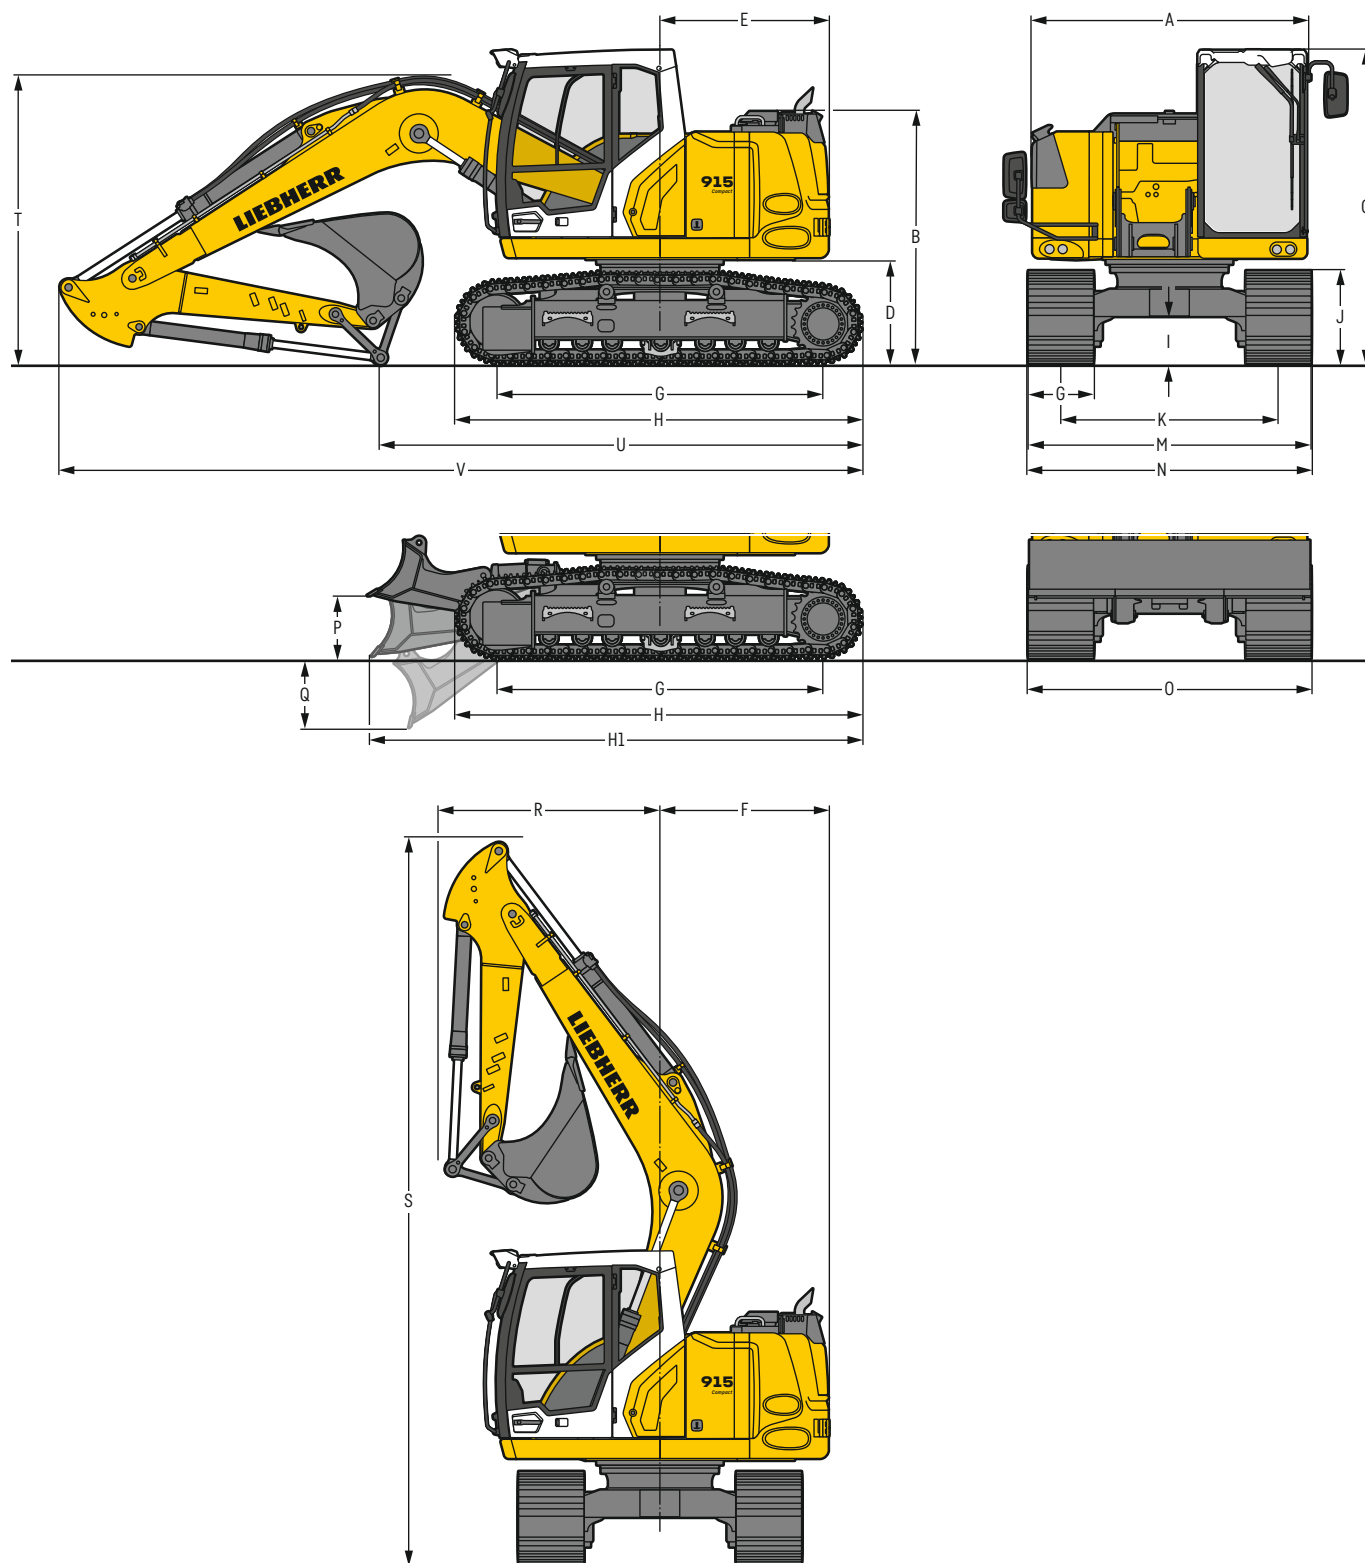

		LC				mm / ft in				LC with blade	mm / ft in			
A	Uppercarriage width					2,525	/	8'	3"		2,525	/	8'	3"
B	Uppercarriage height					2,330	/	7'	8"		2,330	/	7'	8"
C	Cab height					2,895	/	9'	6"		2,895	/	9'	6"
D	Counterweight ground clearance					960	/	3'	2"		960	/	3'	2"
E	Rear-end length					1,550	/	5'	1"		1,550	/	5'	1"
F	Tail swing radius					1,550	/	5'	1"		1,550	/	5'	1"
G	Wheelbase					3,000	/	9'	10"		3,000	/	9'	10"
H	Undercarriage length					3,740	/	12'	3"		3,740	/	12'	3"
H1	Undercarriage length with blade					-					4,525	/	14'	10"
I	Undercarriage ground clearance					435	/	1'	5"		330	/	1'	1"
J	Track height					860	/	2'	10"		860	/	2'	10"
K	Track gauge					2,000	/	6'	7"		2,000	/	6'	7"
L	Track pad width					500	/	20"			500	/	20"	
M	Width over tracks					2,500	/	8'	2"		2,500	/	8'	2"
N	Width over steps					2,500	/	8'	2"		2,500	/	8'	2"
O	Blade width					-					2,500	/	8'	2"
P	Max. blade height					-					580	/	1'	11"
Q	Max. blade depth					-					630	/	2'	1"

¹¹ width with removable steps

		Stick length	Mono boom 4.60 m / 15'1"	
		m / ft in	direct mounting	mm / ft in
R	Front swing radius	2.25 / 7'5"	2,050 / 6' 9"	
		2.45 / 8'	2,050 / 6' 9"	
		2.65 / 8'8"	2,050 / 6' 9"	
S	Height with boom up		6,700 / 22'	
T	Boom height	2.25 / 7'5"	2,700 / 8'10"	
		2.45 / 8'	2,750 / 9'	
		2.65 / 8'8"	2,750 / 9'	
U	Length on ground	2.25 / 7'5"	4,450 / 14' 7"	
		2.45 / 8'	4,250 / 13'11"	
		2.65 / 8'8"	4,100 / 13' 5"	
V	Overall length		7,450 / 24' 5"	
	Bucket		0.50 m³ / 0.65 yd³	

Transport dimensions


removable elements disassembled

	Mono boom 4.60 m / 15'1"			
	mm / ft in			
Pad width	500 / 20"	600 / 24"	700 / 28"	850 / 34"
Transport width	2,525 / 8' 3"	2,600 / 8' 6"	2,700 / 8'10"	2,850 / 9' 4"

	Undercarriage	LC	LC with blade
		mm / ft in	mm / ft in
Transport length		7,450 / 24'5"	8,250 / 27'1"
Transport height		2,895 / 9'6"	
Bucket		0.50 m³ / 0.65 yd³	

Backhoe bucket

with mono boom 4.60 m / 15'1"

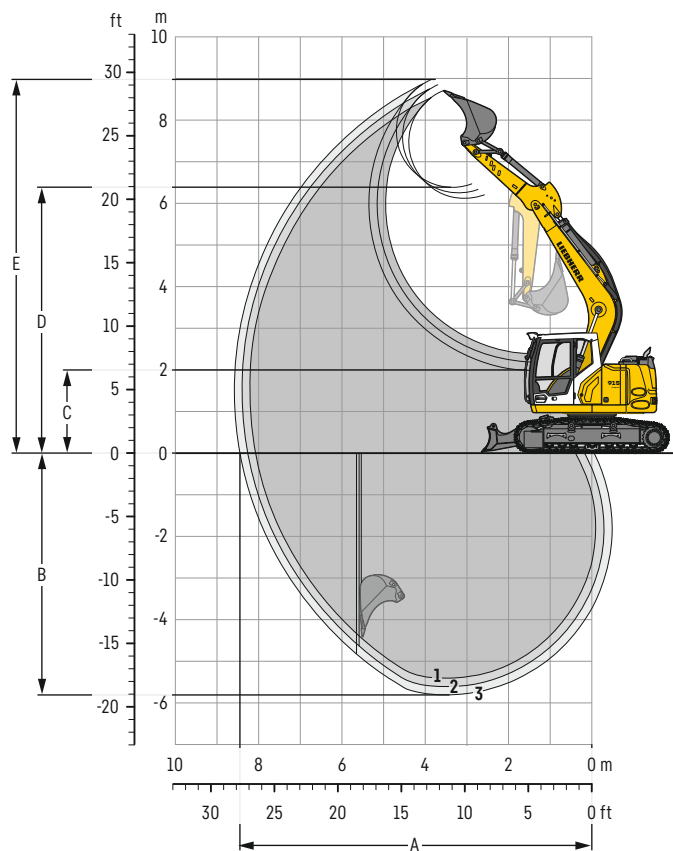

Digging envelope

without quick coupler		1	2	3
Stick length	m / ft in	2.25 / 7' 5"	2.45 / 8'	2.65 / 8' 8"
A Max. reach at ground level	m / ft in	8.07 / 26' 6"	8.26 / 27' 1"	8.45 / 27' 9"
B Max. digging depth	m / ft in	5.41 / 17' 9"	5.61 / 18' 5"	5.81 / 19' 1"
C Min. dumping height	m / ft in	2.39 / 7' 10"	2.19 / 7' 2"	2.00 / 6' 7"
D Max. dumping height	m / ft in	6.12 / 20' 1"	6.25 / 20' 6"	6.39 / 21'
E Max. cutting height	m / ft in	8.71 / 28' 7"	8.84 / 29'	8.98 / 29' 6"

Forces

without quick coupler		1	2	3
Stick digging force (ISO 6015)	kN / lbf	66 / 14,840	62 / 13,940	59 / 13,260
Bucket digging force (ISO 6015)	kN / lbf	89 / 20,010	89 / 20,010	89 / 20,010
Stick digging force (SAE J1179)	kN / lbf	64 / 14,390	60 / 13,490	57 / 12,810
Bucket digging force (SAE J1179)	kN / lbf	80 / 17,990	80 / 17,990	80 / 17,990

Operating weight and ground pressure

The operating weight includes the basic machine with counterweight 2.8 t / 6,170 lb, mono boom 4.60 m / 15'1", stick 2.25 m / 7'5" and backhoe bucket 0.50 m³ / 0.65 yd³ [320 kg / 710 lb].

Undercarriage		LC			
Pad width	mm / in	500 / 20"	600 / 24"	700 / 28"	850 / 34"
Weight	kg / lb	15,060 / 33,200	15,280 / 33,690	15,490 / 34,150	15,820 / 34,880
Ground pressure	kg/cm ² / psi	0.47 / 6.7	0.40 / 5.7	0.34 / 4.8	0.29 / 4.1

Undercarriage		LC with blade			
Pad width	mm / in	500 / 20"	600 / 24"	700 / 28"	
Weight	kg / lb	16,290 / 35,910	16,510 / 36,400	16,720 / 36,860	
Ground pressure	kg/cm ² / psi	0.50 / 7.1	0.43 / 6.1	0.37 / 5.3	

Backhoe bucket Machine stability per ISO 10567* (75 % of tipping capacity)

	Cutting width mm ft in	Capacity ISO 7451 m³ yd³	Weight ³⁾ kg lb	Weight ⁴⁾ kg lb	LC undercarriage (with track pads 600 mm / 24")						LC undercarriage with blade (with track pads 600 mm / 24")					
					Stick length (m / ft in)						Stick length (m / ft in)					
					without quick coupler			with quick coupler			without quick coupler			with quick coupler		
					2.25 7'5"	2.45 8'	2.65 8'8"	2.25 7'5"	2.45 8'	2.65 8'8"	2.25 7'5"	2.45 8'	2.65 8'8"	2.25 7'5"	2.45 8'	2.65 8'8"
STD ¹⁾	500	0.32	230	250	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	1'8"	0.42	510	550	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	550	0.29	250	260	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	1'10"	0.38	550	570	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	650	0.36	270	290	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	2'2"	0.47	600	640	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	850	0.50	320	340	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	2'9"	0.65	710	750	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	1,050	0.65	360	380	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	3'5"	0.85	790	840	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
HD ²⁾	1,250	0.80	420	430	■	■	▲	■	▲	▲	▲	▲	▲	▲	▲	▲
	4'1"	1.05	930	950	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	500	0.32	260	280	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	1'8"	0.42	570	620	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	550	0.29	280	290	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	1'10"	0.38	620	640	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	650	0.36	300	320	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	2'2"	0.47	660	710	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	850	0.50	360	380	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	2'9"	0.65	790	840	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	1,050	0.65	420	430	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	3'5"	0.85	930	950	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	1,250	0.80	480	490	■	▲	▲	■	▲	▲	▲	▲	▲	▲	▲	■
	4'1"	1.05	1,060	1,080												

* indicated loads are based on ISO 10567, at maximum reach, and may be swung 360° on firm and even ground

¹⁾ Standard backhoe bucket with Liebherr teeth Z 50

²⁾ HD backhoe bucket with Liebherr teeth Z 50

³⁾ backhoe bucket for direct mounting

⁴⁾ backhoe bucket for mounting to quick coupler

Other backhoe buckets available upon request

Max. material weight ▲ = 2.0t/m³ / 3,400 lb/yd³, ■ = 1.8t/m³ / 3,000 lb/yd³, ▲ = 1.65t/m³ / 2,800 lb/yd³

Lift capacities

with mono boom 4.60 m / 15'1", counterweight 2.8 t / 6,170 lb and track pads 600 mm / 24"

Stick 2.25 m / 7'5"

	Under-carriage	3.0m 10ft		4.5m 15ft		6.0m 20ft		m ft in	
LC	7.5m t								
	25ft lb								
	6.0m t			3.6	3.9*			2.5*	2.5*
	20ft lb			7.2	7.4*			4.9*	4.9*
	4.5m t			3.6	4.2*	2.2	3.0*	2.1	2.3*
	15ft lb			7.1	8.5*	4.2	4.6*	4.2	4.4*
	3.0m t	6.2	7.3*	3.3	5.1*	2.1	3.3	1.8	2.3*
	10ft lb	12.7	14.9*	6.6	10.2*	4.0	6.5	3.4	4.5*
	1.5m t	5.4	5.4*	3.1	4.9	2.0	3.2	1.7	2.5*
	5ft lb	11.0	12.7*	6.0	9.9	3.8	6.2	3.1	4.8*
	0m t	5.2	6.1*	2.9	4.7	1.9	3.1	1.7	2.6
	0ft lb	10.5	13.6*	5.6	9.5	3.6	6.0	3.1	5.2
LC Blade up	-1.5m t	5.2	9.5	2.8	4.6	1.9	3.0	1.9	2.9
	-5ft lb	10.5	19.6	5.5	9.4	3.6	6.0	3.5	5.9
	-3.0m t	5.3	7.7*	2.9	4.7			2.4	3.9
	-10ft lb	10.7	15.9*	5.6	9.5			4.9	8.1
	7.5m t								
	25ft lb								
	6.0m t			3.9	3.9*			2.5*	2.5*
	20ft lb			8.1*	8.1*			5.5*	5.5*
	4.5m t			3.8	4.2*	2.4	3.0*	2.3	2.3*
	15ft lb			8.3	9.1*	5.2	5.3*	5.1*	5.1*
	3.0m t	6.7	7.3*	3.6	5.1*	2.3	3.4	2.0	2.3*
	10ft lb	14.5	15.7*	7.8	10.9*	5.0	7.4	4.3	5.2*
LC Blade down	1.5m t	5.4*	5.4*	3.3	5.2	2.2	3.3	1.8	2.5*
	5ft lb	12.7	13.2*	7.2	11.1	4.8	7.2	4.0	5.5*
	0m t	5.7	6.1*	3.2	4.9	2.1	3.2	1.8	2.8
	0ft lb	12.2	14.2*	6.8	10.6	4.6	7.0	4.1	6.1
	-1.5m t	5.7	9.5*	3.1	4.9	2.1	3.2	2.1	3.1
	-5ft lb	12.2	20.6*	6.7	10.5	4.6	6.9	4.5	6.8
	-3.0m t	5.8	7.7*	3.2	4.9			2.7	4.1
	-10ft lb	12.4	16.6*	6.8	10.6			6.0	9.2
	7.5m t								
	25ft lb								
	6.0m t			3.9*	3.9*			2.5*	2.5*
	20ft lb			8.1*	8.1*			5.5*	5.5*
	4.5m t			4.0	4.2*	2.5	3.0*	2.3*	2.3*
	15ft lb			8.7	9.1*	5.3*	5.3*	5.1*	5.1*
LC Blade up	3.0m t	7.1	7.3*	3.8	5.1*	2.5	4.2*	2.1	2.3*
	10ft lb	15.4	15.7*	8.2	10.9*	5.3	9.2*	4.6	5.2*
	1.5m t	5.4*	5.4*	3.5	6.0*	2.4	4.6*	1.9	2.5*
	5ft lb	13.2*	13.2*	7.6	13.1*	5.1	10.0*	4.2	5.5*
	0m t	6.1	6.1*	3.3	6.6*	2.3	4.8*	1.9	2.9*
	0ft lb	13.0	14.2*	7.2	14.2*	4.9	10.4*	4.3	6.4*
	-1.5m t	6.1	9.5*	3.3	6.4*	2.2	4.6*	2.2	3.7*
	-5ft lb	13.0	20.6*	7.1	13.9*	4.8	9.4*	4.8	8.3*
	-3.0m t	6.2	7.7*	3.3	5.3*			2.8	4.4*
	-10ft lb	13.3	16.6*	7.2	11.3*			6.3	9.7*
	7.5m t								
	25ft lb								

Stick 2.45 m / 8'

	Under-carriage	3.0m 10ft		4.5m 15ft		6.0m 20ft		m ft in	
LC	7.5m t							2.8*	2.8*
	25ft lb							2.8*	2.8*
	6.0m t			3.7	3.7*			2.2*	2.2*
	20ft lb			7.8	8.1*			4.9*	4.9*
	4.5m t			3.6	4.0*	2.2	3.3*	2.0	2.1*
	15ft lb			7.7	8.7*	4.8	6.4*	4.5	4.6*
	3.0m t	6.3	6.9*	3.3	4.9*	2.1	3.3	1.7	2.1*
	10ft lb	13.6	14.7*	7.2	10.5*	4.6	7.1	3.8	4.7*
	1.5m t	5.4	6.8*	3.1	4.9	2.0	3.2	1.6	2.3*
	5ft lb	11.7	16.4*	6.6	10.6	4.4	6.8	3.5	5.0*
	0m t	5.1	6.4*	2.9	4.7	1.9	3.1	1.6	2.5*
	0ft lb	11.0	14.6*	6.2	10.1	4.2	6.6	3.5	5.5
LC Blade up	-1.5m t	5.1	9.4*	2.8	4.6	1.9	3.0	1.8	2.8
	-5ft lb	11.0	20.1	6.0	9.9	4.1	6.5	3.9	6.2
	-3.0m t	5.2	8.0*	2.8	4.7			2.3	3.6
	-10ft lb	11.2	17.3*	6.1	10.0			5.0	8.1
	7.5m t							2.8*	2.8*
	25ft lb							2.8*	2.8*
	6.0m t			3.7*	3.7*			2.2*	2.2*
	20ft lb			8.1*	8.1*			4.9*	4.9*
	4.5m t			3.9	4.0*	2.4	3.3*	2.1*	2.1*
	15ft lb			8.3	8.7*	5.2	6.4*	4.6*	4.6*
	3.0m t	6.8	6.9*	3.6	4.9*	2.3	3.5	1.9	2.1*
	10ft lb	14.7	14.7*	7.8	10.5*	5.0	7.4	4.1	4.7*
LC Blade down	1.5m t	6.0	6.8*	3.4	5.2	2.2	3.3	1.7	2.3*
	5ft lb	12.8	16.4*	7.2	11.1	4.8	7.2	3.9	5.0*
	0m t	5.6	6.4*	3.2	4.9	2.1	3.2	1.8	2.6*
	0ft lb	12.1	14.6*	6.8	10.6	4.6	6.9	3.9	5.7*
	-1.5m t	5.6	9.4*	3.1	4.8	2.1	3.2	1.9	2.9
	-5ft lb	12.1	21.0*	6.6	10.4	4.5	6.9	4.3	6.5
	-3.0m t	5.7	8.0*	3.1	4.9			2.5	3.8
	-10ft lb	12.3	17.3*	6.7	10.5			5.6	8.5
	7.5m t							2.8*	2.8*
	25ft lb							2.8*	2.8*
	6.0m t			3.7*	3.7*			2.2*	2.2*
	20ft lb			8.1*	8.1*			4.9*	4.9*
	4.5m t			4.0*	4.0*	2.5	3.3*	2.1*	2.1*
	15ft lb			8.7*	8.7*	5.5	6.4*	4.6*	4.6*
LC Blade up	3.0m t	6.9*	6.9*	3.8	4.9*	2.5	4.1*	2.0	2.1*
	10ft lb	14.7*	14.7*	8.2	10.5*	5.3	8.9*	4.4	4.7*
	1.5m t	6.3	6.8*	3.5	5.9*	2.3	4.5*	1.8	2.3*
	5ft lb	13.7	16.4*	7.6	12.8*	5.1	9.8*	4.1	5.0*
	0m t	6.0	6.4*	3.3	6.5*	2.2	4.8*	1.9	2.6*
	0ft lb	13.0	14.6*	7.2	14.1*	4.9	10.4*	4.1	5.7*
	-1.5m t	6.0	9.4*	3.3	6.4*	2.2	4.6*	2.1	3.3*
	-5ft lb	12.9	21.0*	7.0	13.9*	4.8	10.0*	4.5	7.3*
	-3.0m t	6.1	8.0*	3.3	5.5*			2.6	4.3*
	-10ft lb	13.1	17.3*	7.1	11.8*			5.9	9.5*
	7.5m t								
	25ft lb								



Height



Can be slewed through 360°



In longitudinal position of undercarriage



Max. reach

* Limited by hydr. capacity

The load values are quoted in tons (t) / lb x 1,000 at stick end (without bucket), and may be swung 360° on firm and even ground. Adjacent values are valid for the undercarriage when in the longitudinal position. Capacities are valid for 600 mm / 24" wide track pads. Indicated loads are based on ISO 10567 standard and do not exceed 75% of tipping or 87% of hydraulic capacity (indicated by *). Without bucket cylinder, link and lever the lift capacities will increase by 176 kg / 390 lb. Lifting capacity of the excavator is limited by machine stability and hydraulic capacity.

Determine maximum load lift from load lift chart displayed in the operator's cab or from load lift chart detailed in the operator's manual supplied with the machine.

Stick 2.65 m / 8'8"


Under-carriage		3.0m 10ft		4.5m 15ft		6.0m 20ft				m ft in
										
LC	7.5m t							2.5*	2.5*	3.8
	25ft lb							5,6 #	(5,6 #)	11'8"
	6.0m t			3.5*	3.5*			2.0*	2.0*	5.6
	20ft lb			7,7 #	(7,7 #)			4,5 #	(4,5 #)	18'
	4.5m t			3.6	3.8*	2.2	3.3*	1.9*	1.9*	6.6
	15ft lb			7,8	(8,2 #)	4,8	(6,8 #)	4,2 #	(4,2 #)	21'5"
	3.0m t	6.4	6.4*	3.4	4.7*	2.2	3.3	1.6	1.9*	7.1
	10ft lb	13,7 #	(13,7 #)	7,3	(10,1 #)	4,6	(7,1)	3,6	(4,2 #)	23'2"
	1.5m t	5.5	8.3*	3.1	4.9	2.0	3.2	1.5	2.1*	7.2
	5ft lb	11,9	(20,2 #)	6,6	(10,6)	4,4	(6,8)	3,3	(4,5 #)	23'10"
	0m t	5.1	6.6*	2.9	4.7	1.9	3.1	1.5	2.3*	7.1
	0ft lb	11,0	(15,1 #)	6,2	(10,1)	4,1	(6,6)	3,3	(5,2 #)	23'2"
LC	-1.5m t	5.1	9.0*	2.8	4.6	1.9	3.0	1.7	2.6	6.6
	-5ft lb	10,9	(20,0)	6,0	(9,9)	4,0	(6,5)	3,7	(5,9)	21'6"
	-3.0m t	5.2	8.3*	2.8	4.6			2.1	3.4	5.6
	-10ft lb	11,1	(18,0 #)	6,0	(9,9)			4,7	(7,5)	18'2"
	7.5m t							2.5*	2.5*	3.8
	25ft lb							5,6 #	(5,6 #)	11'8"
	6.0m t			3.5*	3.5*			2.0*	2.0*	5.6
	20ft lb			7,7 #	(7,7 #)			4,5 #	(4,5 #)	18'
	4.5m t			3.8*	3.8*	2.4	3.3*	1.9*	1.9*	6.6
	15ft lb			8,2 #	(8,2 #)	5,2	(6,8 #)	4,2 #	(4,2 #)	21'5"
	3.0m t	6.4*	6.4*	3.7	4.7*	2.4	3.5	1.8	1.9*	7.1
	10ft lb	13,7 #	(13,7 #)	7,9	(10,1 #)	5,1	(7,4)	4,0	(4,2 #)	23'2"
LC	1.5m t	6.0	8.3*	3.4	5.2	2.2	3.3	1.7	2.1*	7.2
	5ft lb	13,0	(20,2 #)	7,3	(11,1)	4,8	(7,2)	3,7	(4,5 #)	23'10"
	0m t	5.6	6.6*	3.1	4.9	2.1	3.2	1.7	2.3*	7.1
	0ft lb	12,1	(15,1 #)	6,8	(10,6)	4,6	(6,9)	3,7	(5,2 #)	23'2"
	-1.5m t	5.6	9.0*	3.1	4.8	2.1	3.2	1.8	2.8	6.6
	-5ft lb	12,0	(20,6 #)	6,6	(10,4)	4,5	(6,8)	4,1	(6,2)	21'6"
	-3.0m t	5.7	8.3*	3.1	4.9			2.3	3.5	5.6
	-10ft lb	12,2	(18,0 #)	6,6	(10,4)			5,2	(7,9)	18'2"
	7.5m t							2.5*	2.5*	3.8
	25ft lb							5,6 #	(5,6 #)	11'8"
	6.0m t			3.5*	3.5*			2.0*	2.0*	5.6
	20ft lb			7,7 #	(7,7 #)			4,5 #	(4,5 #)	18'
LC	4.5m t			3.8*	3.8*	2.6	3.3*	1.9*	1.9*	6.6
	15ft lb			8,2 #	(8,2 #)	5,5	(6,8 #)	4,2 #	(4,2 #)	21'5"
	3.0m t	6.4*	6.4*	3.8	4.7*	2.5	4.0*	1.9	1.9*	7.1
	10ft lb	13,7 #	(13,7 #)	8,3	(10,1 #)	5,3	(8,7 #)	4,2	(4,2 #)	23'2"
	1.5m t	6.4	8.3*	3.6	5.7*	2.3	4.4*	1.8	2.1*	7.2
	5ft lb	13,8	(20,2 #)	7,7	(12,4 #)	5,1	(9,6 #)	3,9	(4,5 #)	23'10"
	0m t	6.0	6.6*	3.3	6.4*	2.2	4.7*	1.8	2.3*	7.1
	0ft lb	13,0	(15,1 #)	7,2	(13,9 #)	4,8	(10,3 #)	3,9	(5,2 #)	23'2"
	-1.5m t	6.0	9.0*	3.2	6.5*	2.2	4.7*	1.9	2.9*	6.6
	-5ft lb	12,8	(20,6 #)	7,0	(14,0 #)	4,7	(10,1 #)	4,3	(6,4 #)	21'6"
	-3.0m t	6.1	8.3*	3.3	5.7*			2.4	4.2*	5.6
	-10ft lb	13,0	(18,0 #)	7,0	(12,2 #)			5,5	(9,3 #)	18'2"

 Height  Can be slewed through 360°  In longitudinal position of undercarriage  Max. reach * Limited by hydr. capacity

The load values are quoted in tons (t) / lb x 1,000 at stick end (without bucket), and may be swung 360° on firm and even ground. Adjacent values are valid for the undercarriage when in the longitudinal position. Capacities are valid for 600 mm / 24" wide track pads. Indicated loads are based on ISO 10567 standard and do not exceed 75% of tipping or 87% of hydraulic capacity (indicated via *). Without bucket cylinder, link and lever the lift capacities will increase by 176 kg / 390 lb. Lifting capacity of the excavator is limited by machine stability and hydraulic capacity.


Determine maximum load lift from load lift chart displayed in the operator's cab or from load lift chart detailed in the operator's manual supplied with the machine.

Attachments




Backhoe bucket TL 02

Mounting	direct mounting, SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink, SWA 48 mechanical, SWA 48 hydraulic, SWA 48 Solidlink								
Cutting width	mm / ft in	300 ³⁾ / 1'3" ⁴⁾	400 ³⁾ / 1'4" ⁵⁾ ⁴⁾	500 ⁴⁾ / 1'8" ⁴⁾	550 / 1'10"	650 / 2'2"	850 / 2'9"	1,050 / 3'5"	1,250 / 4'1"
Capacity	m ³ / yd ³	0.17 ⁵⁾ / 0.22 ⁵⁾	0.24 ⁵⁾ / 0.31 ⁵⁾	0.32 ⁵⁾ / 0.42 ⁵⁾	0.29 / 0.38	0.36 / 0.47	0.50 / 0.65	0.65 / 0.85	0.80 / 1.05
Weight ¹⁾	kg / lb	225 / 496	245 / 540	250 / 551	260 / 573	285 / 628	335 / 739	380 / 838	430 / 948




2in1 bucket HTL 02

Mounting	SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink, SWA 48 mechanical, SWA 48 hydraulic, SWA 48 Solidlink								
Cutting width	mm / ft in	300 ³⁾ / 1'3"	400 ³⁾ / 1'4" ⁵⁾	500 ⁴⁾ / 1'8" ⁴⁾	650 / 2'2"	850 / 2'9"	1,050 / 3'5"	1,250 / 4'1"	
Capacity	m ³ / yd ³	0.17 / 0.22	0.24 / 0.31	0.32 / 0.42	0.36 / 0.47	0.50 / 0.65	0.65 / 0.85	0.80 / 1.05	
Weight ¹⁾	kg / lb	284 / 626	291 / 642	287 / 633	321 / 708	371 / 818	416 / 917	465 / 1,025	




Universal bucket

Mounting	SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink, SWA 48 mechanical, SWA 48 hydraulic, SWA 48 Solidlink								
UL 02									
Cutting width	mm / ft in	1,400 / 4'7"				1,400 / 4'7"			
Capacity	m ³ / yd ³	0.40 / 0.52				0.50 / 0.65			
Weight ¹⁾	kg / lb	227 / 500				240 / 529			
UL 03									
Cutting width	mm / ft in	1,500 / 4'11"							
Capacity	m ³ / yd ³	0.60 / 0.78							
Weight ¹⁾	kg / lb	368 / 811							




Ditch cleaning bucket GRL rigid 02

Mounting	direct mounting, SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink, SWA 48 mechanical, SWA 48 hydraulic, SWA 48 Solidlink								
Cutting width	mm / ft in	1,500 / 4'11"			2,000 / 6'7"		2,000 / 6'7"		
Capacity	m ³ / yd ³	0.50 / 0.65			0.48 / 0.63		0.65 / 0.85		
Weight ¹⁾	kg / lb	362 / 798			351 / 774		385 / 849		




Grading bucket PL 02

Mounting	SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink, SWA 48 mechanical, SWA 48 hydraulic, SWA 48 Solidlink								
Cutting width	mm / ft in	1,400 / 4'7"				1,600 / 5'3"			
Capacity	m ³ / yd ³	0.40 / 0.52				0.50 / 0.65			
Weight ¹⁾	kg / lb	280 / 617				310 / 683			



Ditch cleaning bucket with hydraulic cylinder GRL 50

Mounting	direct mounting, SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink, SWA 48 mechanical, SWA 48 hydraulic, SWA 48 Solidlink											
Cutting width	mm / ft in	1,600 / 5'3"	1,600 / 5'3"	2,000 / 6'7"	2,000 / 6'7"	2,000 / 6'7"	2,200 / 7'3"	2,200 / 7'3"	2,200 / 7'3"	2,400 / 7'10"	2,400 / 7'10"	2,800 / 9'2"
Capacity	m ³ / yd ³	0.55 / 0.72	0.80 / 1.05	0.50 / 0.65	0.70 / 0.92	1.00 / 1.31	0.80 / 1.05	1.15 / 1.50	1.40 / 1.83	0.85 / 1.11	1.25 / 1.63	1.85 / 2.42
Weight ²⁾	kg / lb	690 / 1,521	850 / 1,874	695 / 1,532	875 / 1,929	935 / 2,061	910 / 2,006	985 / 2,172	995 / 2,194	890 / 1,962	1,000 / 2,205	1,090 / 2,403
Tilt angle		2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°



Tilt bucket with hydraulic cylinder SL 90

Mounting	direct mounting, SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink, SWA 48 mechanical, SWA 48 hydraulic, SWA 48 Solidlink								
Cutting width	mm / ft in	1,400 / 4'7"	1,500 / 4'11"	1,500 / 4'11"	1,600 / 5'3"	1,600 / 5'3"	1,600 / 5'3"	1,600 / 5'3"	1,600 / 5'3"
Capacity	m ³ / yd ³	0.55 / 0.72	0.60 / 0.78	1.20 / 1.57	0.80 / 1.05	1.00 / 1.31	1.35 / 1.77	1.55 / 2.03	
Weight ²⁾	kg / lb	715 / 1,576	738 / 1,627	970 / 2,138	820 / 1,808	890 / 1,962	970 / 2,138	1,030 / 2,271	
Tilt angle		2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°


¹⁾ based on an attachment in a standard design with SWA 33 Solidlink quick coupler mounting

²⁾ based on an attachment in a standard design with SWA 48 Solidlink quick coupler mounting

³⁾ limited digging depth due to mounting for SWA 33 quick coupler


⁴⁾ limited digging depth due to mounting for SWA 48 quick coupler

⁵⁾ reduced capacity with direct mounting




Clamshell grab

Mounting	direct mounting, SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink, SWA 48 mechanical, SWA 48 hydraulic, SWA 48 Solidlink					
GM 058 Clamshell buckets						
Shell width	mm / ft in	300 / 1'	400 / 1'4"	600 / 2'	800 / 2'7"	1,000 / 3'3"
Capacity ¹⁾	m ³ / yd ³	0.10 / 0.13	0.13 / 0.17	0.20 / 0.26	0.27 / 0.35	0.34 / 0.44
Opening width	mm / ft	1,217 / 4'	1,217 / 4'	1,217 / 4'	1,217 / 4'	1,217 / 4'
Weight ²⁾	kg / lb	410 / 904	445 / 981	475 / 1,047	515 / 1,135	590 / 1,301
GMZ 18 Clamshell buckets						
Shell width	mm / ft in	320 / 1'1"	400 / 1'4"	600 / 2'	800 / 2'7"	
Capacity ¹⁾	m ³ / yd ³	0.17 / 0.22	0.22 / 0.29	0.30 / 0.39	0.40 / 0.52	
Opening width	mm / ft in	1,462 / 4'10"	1,462 / 4'10"	1,392 / 4'7"	1,392 / 4'7"	
Weight ²⁾	kg / lb	670 / 1,477	705 / 1,554	715 / 1,576	765 / 1,687	
GMZ 22 Clamshell buckets						
Shell width	mm / ft in	300 / 1'	400 / 1'4"	600 / 2'	800 / 2'7"	1,000 / 3'3"
Capacity ¹⁾	m ³ / yd ³	0.14 / 0.18	0.20 / 0.26	0.30 / 0.39	0.42 / 0.55	0.54 / 0.71
Opening width	mm / ft in	1,502 / 4'11"	1,502 / 4'11"	1,502 / 4'11"	1,502 / 4'11"	1,502 / 4'11"
Weight ²⁾	kg / lb	680 / 1,499	710 / 1,565	780 / 1,720	855 / 1,885	935 / 2,061




Sorting grab

Mounting	direct mounting, SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink, SWA 48 mechanical, SWA 48 hydraulic, SWA 48 Solidlink								
SG 20B									
Shell type	perforated					closed			
Shell width	mm / ft in	800 / 2'7"	1,000 / 3'3"	1,200 / 3'11"	1,400 / 4'7"	800 / 2'7"	1,000 / 3'3"	1,200 / 3'11"	1,400 / 4'7"
Capacity	m ³ / yd ³	0.40 / 0.52	0.50 / 0.65	0.60 / 0.78	0.70 / 0.92	0.40 / 0.52	0.50 / 0.65	0.60 / 0.78	0.70 / 0.92
Max. closing force	kN / lbf	40 / 8,992	40 / 8,992	40 / 8,992	40 / 8,992	40 / 8,992	40 / 8,992	40 / 8,992	40 / 8,992
Weight ³⁾	kg / lb	750 / 1,653	795 / 1,753	840 / 1,852	885 / 1,951	765 / 1,687	810 / 1,786	850 / 1,874	895 / 1,973
SG 20B with universal shell									
Shell width	mm / ft in	650 / 2'2"							
Capacity	m ³ / yd ³	0.15 / 0.20							
Max. closing force	kN / lbf	57 / 12,814							
Weight ⁴⁾	kg / lb	831 / 1,832							




Adapter plate

SWA 33 / SWA 48						
Version		SWA 33	SWA 33 XL	SWA 48	SWA 48 XL	SWA 48 XXL
Weight ⁵⁾	kg / lb	102 / 225	140 / 309	153 / 337	225 / 496	282 / 622
SWA 33 Solidlink / SWA 48 Solidlink						
Version		SWA 33 Solidlink	SWA 33 Solidlink XL	SWA 48 Solidlink	SWA 48 Solidlink XL	SWA 48 Solidlink XXL
Weight ⁶⁾	kg / lb	145 / 320	182 / 401	210 / 463	281 / 619	338 / 745



Tiltrotator TR 20B

Mounting machine side	SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink, SWA 48 mechanical, SWA 48 hydraulic, SWA 48 Solidlink	
Mounting attachment side	SWA 33 mechanical, SWA 33 hydraulic, SWA 48 mechanical, SWA 48 hydraulic	
Weight ⁷⁾	kg / lb	641 / 1,413
Rotation	360°	
Tilt	2 x 50°	



Tilt unit LiTiU 33⁹⁾

Mounting machine side	SWA 33 Solidlink
Mounting attachment side	SWA 33 hydraulic, SWA 33 Solidlink
Weight ⁹⁾	kg / lb 410 / 904
Tilt	2 x 50°

¹⁾ capacity specifications are theoretically determined values; fill level varies depending on the material being loaded

²⁾ without suspension

³⁾ with standard bolt-on cutting edge, without quick coupler mounting

⁴⁾ with Liebherr teeth Z 35 C, without quick coupler mounting

⁵⁾ based on a standard adapter plate with opening and with SWA 33 / SWA 48 quick coupler mounting


⁶⁾ based on a standard adapter plate with opening, with full hydraulic assignment and with SWA 33 Solidlink / SWA 48 Solidlink quick coupler mounting

⁷⁾ based on standard tiltrotator TR 20B with SWA 33 Solidlink quick coupler mounting machine side and SWA 33 hydraulic quick coupler mounting on the underside tiltrotator

⁸⁾ based on standard tilt unit LiTiU 33 with SWA 33 Solidlink quick coupler mountings on both sides (underside of tilt unit and machine side quick coupler mounting)

⁹⁾ on the machine side, a 14-pin signal contact strip is always required; switching takes place between tilting the LiTiU and the grab rotation circle for the attachment

Attachments



Pallet fork

PG SWA 33 FEM II

Mounting	SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink	
Fork length	mm / ft in	1,200 / 3'11"
Max. width pallet fork	mm / ft in	1,245 / 4'1"
Lift capacity (ISO 2328)	t / lb	2.5 / 5,512
Weight	kg / lb	330 / 728

PG SWA 33 FEM III

Mounting	SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink	
Fork length	mm / ft in	1,200 / 3'11"
Max. width pallet fork	mm / ft in	1,500 / 4'11"
Lift capacity (ISO 2328)	t / lb	5.0 / 11,023
Weight	kg / lb	579 / 1,276

PG SWA 48 FEM II

Mounting	SWA 48 mechanical, SWA 48 hydraulic, SWA 48 Solidlink	
Fork length	mm / ft in	1,200 / 3'11"
Max. width pallet fork	mm / ft in	1,245 / 4'1"
Lift capacity (ISO 2328)	t / lb	2.5 / 5,512
Weight	kg / lb	345 / 761



Load chain / Spreader bar

Load chain for SWA 33 quick coupler, with load hook

Lift capacity (WLL)	t / lb	6.7 / 14,771
Overall height	mm / ft in	536 / 1'9"
Weight	kg / lb	6 / 13

Load chain for SWA 33 quick coupler, without load hook

Lift capacity (WLL)	t / lb	6.7 / 14,771
Overall height	mm / in	246 / 10"
Weight	kg / lb	2 / 4

Spreader bar for SWA 33 quick coupler, with load hook

Lift capacity (WLL)	t / lb	10.0 / 22,046
Overall height	mm / ft in	745 / 2'5"
Weight	kg / lb	21.7 / 48



Load hook / Lifting shackle

Mounting	SWA 33 mechanical, SWA 33 hydraulic, SWA 33 Solidlink, SWA 48 mechanical, SWA 48 hydraulic, SWA 48 Solidlink	
Version	Single load hook	Double load hook

Load hook

Lift capacity (WLL)	t / lb	12.5 / 27,558
Height	mm / ft in	545 / 1'9"
Weight ¹⁾	kg / lb	67 / 148

Load hook on rotary drive

Lift capacity (WLL)	t / lb	12.5 / 27,558
Height	mm / ft in	1,032 / 3'5"
Weight ¹⁾	kg / lb	344 / 758

Lifting shackle

Lift capacity (WLL)	t / lb	35 / 77,162
Height	mm / in	226 / 9"
Weight ¹⁾	kg / lb	26 / 57

¹⁾ without suspension

Serial equipment



Undercarriage

Track components & tracks & steps

Lashing eyes
Track and carrier rollers, sealed and lifetime-lubricated
Undercarriage LC, track gauge 2,000 mm / 6'7"



Uppercarriage

Hydraulic & engine

Filters accessible from ground level
Fuel fine filter
Fuel pre-filter and water separator
Power Pack USA Tier 4 Final
Pressure accumulator for controlled lowering of equipment with engine turned off

Counterweight & inspection

Counterweight standard 2.8t / 6,170lb

Options

Main switch accessible from ground level
Main switch, electric, with timer



Equipment

Boom

Pipe fracture safety valve for stick cylinder
Pipe fracture safety valves for boom cylinders



Control

Safety & operation

Automatic engine idling / speed increase
Horn
Modetronic
Positioning swing brake automatic

Hydraulic & control

10" color touchscreen
Control pattern digital
DEF level on touchscreen
Display controller button
Display with haptic feedback
Fuel level on touchscreen
High pressure circuit with Tool Control
Hydraulic oil level on touchscreen
Joystick proximity sensor
Power modes
Start / Stop button
Touchpad 3.5"

Assistance systems

Smartphone interface



Cab

Interior

Air-conditioned bottle holder
Air-conditioned storage compartment
Armrests adjustable in length, height and inclination
Automatic air conditioning
Coat hook
Consoles linked to the seat and adjustable
Emergency hammer with seat belt cutter
Emergency stop hydraulic and engine in cab
Front windscreen washer mobile spray
Hand free kit
Inner temperature sensor
Interior lighting LED
Key storage
Liebherr Connect
Mood lighting LED
Outer temperature sensor
Radio Comfort
Roll-down sun blinds for windscreen and roof window
Seat belt reminder
Sockets in cab (USB)
Solar radiation sensor
Storage nets
Storage space backpack
Storage tablet
Tilttable console left with safety lever

Exterior

Bottom windscreen wiper
Cab air filters, accessible from ground level
Impact resistant roof window
Laminated right hand side window
Preparation for top and front guard FOPS-FGPS
Rain hood over front window opening
Rear window emergency exit
Windscreen wiper
Windshield washer fluid tank accessible from ground level

Use & operation

DEF consumption on touchscreen
Fuel consumption on touchscreen
ROPS
Swing braking torque adjustable
Switch between high pressure circuit and bucket cylinder

Equipment standard / option

Undercarriage

Track components & tracks & steps	
Chain guide 1 piece	●
Chain guide 3 pieces	+
Dozer and stabilizer blade 2,500 mm / 8'2"	+
Dozer and stabilizer blade 2,600 mm / 8'6"	+
Dozer and stabilizer blade 2,700 mm / 8'10"	+
Rubber track pads 500 mm / 20"	+
Steps	●
Steps wide	+
Track pads triple grouser 500 mm / 20" / 700 mm / 28" / 850 mm / 34"	+
Track pads triple grouser 600 mm / 24"	●
Undercarriage storage compartment	+

Uppercarriage

Hydraulic & engine	
Air pre-filter with cyclonical dust trap	+
Automatic engine shutdown after idling (with timer)	+
Automatic engine shutdown after idling (without timer)	+
Bypass filter for hydraulic oil	+
Hydraulic oil, Liebherr Hydraulic Basic 100 (0 to +55 °C / 32 to 131 °F)	+
Hydraulic oil, Liebherr Hydraulic HVI (-20 to +40 °C / -4 to +104 °F)	●
Hydraulic oil, Liebherr Hydraulic Plus Arctic, high performance oil (-40 to +30 °C / -40 to +86 °F)	+
Hydraulic oil, Liebherr Hydraulic Plus, high performance oil (-30 to +45 °C / -22 to +113 °F)	+
Preheating fuel	+
Radiator fine mesh protection grid	+
Reversible fan drive	+
Tank refilling pump fuel	+
Options	
Centralized lubrication automatic swing ring and equipment	●
Extended tool set including tool box	+
Headlight on uppercarriage, lateral right, LED+, 1 piece	+ ¹⁾
Headlights on uppercarriage, front, LED, 2 pieces, protections included	● ¹⁾
Headlights on uppercarriage, front, LED+, 2 pieces, protections included	+ ¹⁾
Headlights on uppercarriage, rear, LED+, 2 pieces	+ ¹⁾
Lighting for cab access	+ ¹⁾
Reflective warning stickers	+
Socket on uppercarriage (24 V)	+
Tool set	●
Warning beacon on uppercarriage, rear, LED, 1 piece	+

Equipment

Boom	
Floating boom	+
Headlight guards on boom	+
Headlights on boom, LED, 2 pieces	● ¹⁾
Headlights on boom, LED+, 2 pieces	+ ¹⁾
Mono boom 4.60 m / 15'1"	+
Two-piece boom 4.85 m / 15'11"	+
Stick & attachment mounting	
Bucket cylinder rod protection	+
Centralized lubrication automatic connecting link	+
Centralized lubrication automatic quick coupler	+
Coupling system Solidlink for quick coupler SWA 33	+
Coupling system Solidlink for quick coupler SWA 48	+
GPS for attachment (via 5-pin signal contacts)	+
GPS for attachment (via 14-pin signal contacts)	+
Headlights on stick, right and left, LED+, 2 pieces, protections included	+ ¹⁾
Lifting eye on stick 8.0 t / 17,640 lb (500 mm / 1'8" from stick end pin)	+
Load holding valve for bucket cylinder (both sides)	+
Quick coupler SWA 33 hydraulic	+
Quick coupler SWA 48 hydraulic	+
Signal contacts for Solidlink 5-pin	+
Signal contacts for Solidlink 5-pin and 14-pin	+
Signal contacts for Solidlink 14-pin	+
Socket on stick (24 V)	+
Stick 2.25 m / 7'5"	+
Stick 2.45 m / 8'	+
Stick 2.65 m / 8'8"	+
Stick bottom protection	+



Cab

Interior	
2-points seat belt, 2"	●
2-points seat belt, 3"	+
3-points seat belt, 2"	+
Auxiliary heater programmable	+
Fire extinguisher	+
Footrest	+
Mobile phone holder with inductive charging	+
Multifunction mounting bracket	+
Operator's seat Comfort	●
Operator's seat Premium	+
Remote cab lock	+ ¹⁾
Roll-down sun blinds for rear and side window, right	+
Travel alarm system standard switchable	+
Travel pedals with travel levers removable	+
Exterior	
Electrically adjustable and heated outside rear-view mirrors	+
FGPS front guard with side opening	+
FOPS top guard	+
FOPS top guard flat	+
Headlight on cab, rear, LED+, 1 piece	+ ¹⁾
Headlights on cab, front, LED, 2 pieces	● ¹⁾
Headlights on cab, front, LED+, 2 pieces	+ ¹⁾
Impact resistant one-piece windscreen	+
Lightbar on cab, LED	+
Rearview mirror on cab	●
Retractable laminated two-piece windscreen	●
Roof window wiper	+
Warning beacon foldable on cab, LED, 1 piece	+
Use & operation	
Filter for hydraulic hammer return flow	+
Leak oil line for attachment	+



Control

Safety & operation	
Overload warning system	+
Hydraulic & control	
Attachment continuous operation system	+
Double pedal, left	+
Double pedal, right	+
Joysticks Premium	●
Medium pressure circuit	+
Operation pallet fork	+
Preparation for tiltrotator	+
Assistance systems	
MIC 4.0 BUS communication standard	+
Preparation for machine control system	+
Rear view and right hand side view monitoring cameras	●
Skyview 360°	+
Smart Key Comfort	+
Smart Key Standard	●



General

Coating & transport	
Special paint	+



Packages

Coming / Leaving Home	+ ¹⁾
Luminosity control (LED+ headlights)	+ ¹⁾

● = Standard, + = Option

¹⁾ equipment not individually available, but only as predefined packages

Non-exhaustive list, please contact us for further information.

Options and / or special equipment, supplied by vendors other than Liebherr, are only to be installed with the knowledge and approval of Liebherr in order to retain warranty.

Information & Sales



Downloads

All brochures for earthmoving and material handling at a glance.

Download now and find out more!



Configurator

Configure the perfect machine for your application.

Start now and choose the ideal solution!



Energy efficiency calculator

See how much fuel you can save with a Liebherr.

Calculate your consumption now and start saving!



Sales partner

Your local contacts.

Find your sales partner and get advice specific to your needs!



MyGuide app

Products, information and news – all in one app.

Download now and get started right away!




Contact form

We will take care of your request.

Get in touch now and we will work on your enquiry together!

[illegible]

The Liebherr Group

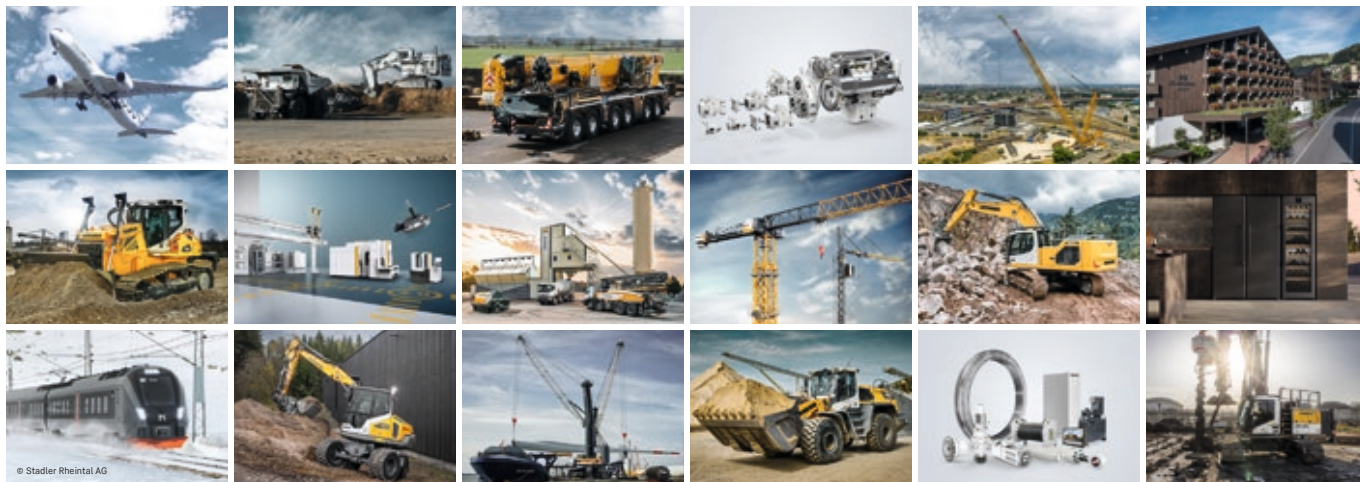

Global and independent: more than 75 years of success

Liebherr was founded in 1949. With the development of the world's first mobile tower crane, Hans Liebherr laid the foundations of a successful family-run company which today comprises more than 150 companies on all continents with over 55,000 employees. The holding company of the Group is Liebherr-International AG in Bulle (Switzerland), whose shareholders are exclusively members of the Liebherr family.

Technology leadership and pioneering spirit

Liebherr regards itself as a pioneer. This spirit has enabled the company to make a decisive contribution to the technological history of many industries. Today, employees around the world still share the courage of the company founder to take new paths. They are all united by a passion for technology and fascinating products and the determination to perform outstanding work for their customers.

Widely diversified product program

Not only is Liebherr one of the biggest construction machine manufacturers in the world, it also provides high-quality, user-oriented products and services in a wide range of other areas. The product range includes the segments earthmoving, material handling, deep foundation, mining, mobile and crawler cranes, tower cranes, concrete technology, maritime cranes, aerospace and transportation systems, gear technology and automation systems, refrigerators and freezers, components and hotels.

Customized solutions and maximum customer value

Liebherr solutions are characterized by maximum precision, outstanding implementation and exceptional longevity. Its mastery of key technologies enables the company to offer its customers customized solutions. For Liebherr, customer focus does not end with the product; it also encompasses a wide range of services that make a real difference.

www.liebherr.us

WARNING

Breathing diesel engine exhaust exposes you to chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

- Always start and operate the engine in a well-ventilated area.
- If in an enclosed area, vent the exhaust to the outside.
- Do not modify or tamper with exhaust system.
- Do not idle the engine except as necessary.

For more information go to www.P65warnings.ca.gov/diesel.

WARNING

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to www.P65warnings.ca.gov.

Liebherr USA, Co.

Construction Equipment Division • 4800 Chestnut Avenue • Newport News, VA 23607, USA • Phone +1 (757) 240 4250
construction.usa@liebherr.com • www.liebherr.us • www.facebook.com/LiebherrConstruction