

Model: Please mark choice

2511-J _____

2511-JE (Electric start) _____

2513-J _____

2513-JE (Electric start) _____

2500 Series

Cart Jetter

Hydro Jetter

O'BRIEN MANUFACTURING™


2-wheel cart is easy to load and unload in your vehicle and easily transported up and down steps.

2511-J Includes:

- 11hp manual start gasoline engine
- Triplex pump - 4.0 GPM @ 3,000 psi

2513-J Includes:

- 13hp manual start gasoline engine
- Triplex pump - 4.8 GPM @ 3,000 psi

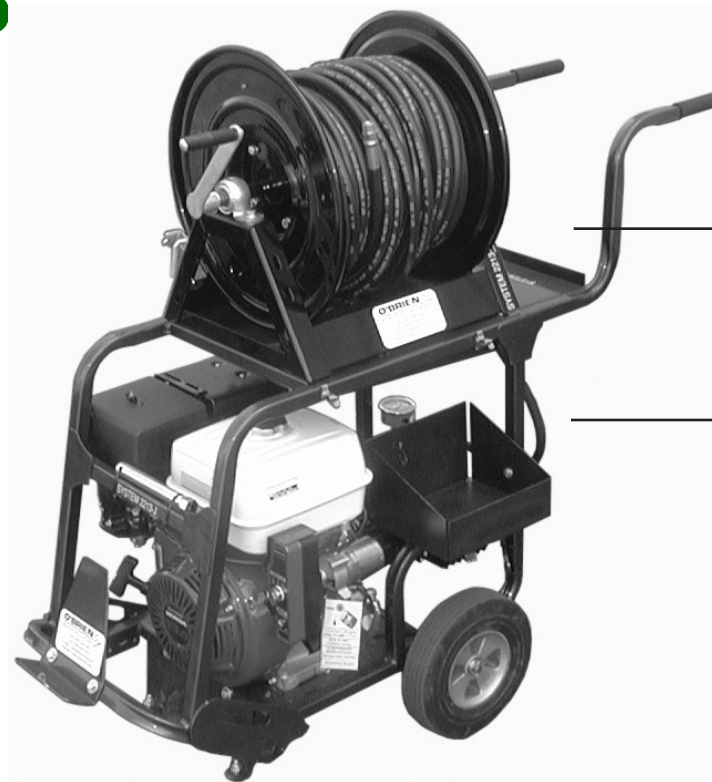

Drip Pan

Battery/Tool Tray

2500 Series Complete Kit Includes:

- Durable powder-coated cart
- 10" semi-pneumatic tires
- Two Nozzles - 3/8" Penetrator and 3/8" Flusher
- Nozzle storage rack
- 300' capacity hose reel w/positive locking
- 200' of 3/8" High-Impact sewer hose
- Thermal relief valve
- Throttle control valve
- Ball valve
- Unloader
- Pulsator
- 5,000 psi liquid-filled gauge
- Drip pan
- Tool storage tray
- Adjustable pressure control
- Garden Hose inlet with strainer

Available Options: (Please check all that apply)

- ___ Filter Inlet (22145B)
- ___ Washdown Gun Package (OBJ-1720K)
- ___ Aux. Cleaning Kit (OBJ-1724K)
- ___ 3/16" Trap Hose Package (OBJ-1722K)
- ___ Cavalry Nozzle Kit (380530)
- ___ Freight - Delivery Included
- ___

4-Wheel Option

4-Wheel Capability - (OBJ-9064)
Bolt-on and off front wheels enable the unit to be utilized as a 2 or 4 wheel machine, depending on the application.

*Battery not included.

Dimensions of 2-wheel cart:

Height - 46"
Width - 24"
Length - 59"
Weight -- 328 lbs.

Cart Jettors

These user-friendly models are geared for residential and commercial sewer lines up to 8" in diameter. The optional lateral cleaning kit package allows you to leave the engine outside a building while you clean an inside line. With an automatic throttle control valve, the engine responds to your water usage. Open the flow, and it revs up to maintain maximum pressure. Cut the flow, and it idles down for reduced noise, pump wear, and engine wear.

Your Price: _____

Signature: _____ Printed Name: _____ Date: _____