

# Detachable grabber GRD40-GRD70


**engcon**<sup>®</sup>

**For all excavators in the 13,200-57,300 lbs  
(6-26 metric ton)**


Engcon's new detachable grabber cassette is also retro-fittable.

The grabber cassette simply hooks onto the Q-Safe-D quick coupler and is then locked in place and the hydraulics connected in a single maneuver – a procedure that takes less than a minute.

The grabber is angled at 15 degrees to the plane of rotation, giving a longer reach.

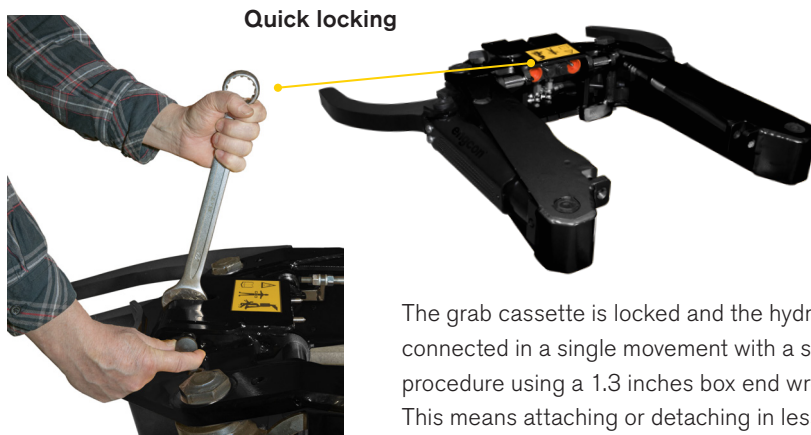

The grab cassette is locked and the hydraulics connected in a single movement with a simple procedure using a 1.3 inches box end wrench. This means attaching or detaching in less than a minute.

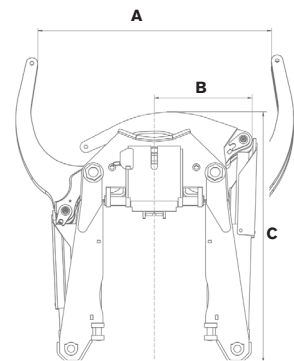

## Specifications

Model	GRD40	GRD45/50	GRD60	GRD70
Grab width A: (inch)	17	24	32,3	37,4
Width B: (inch)	8,6	10,6	14	16,1
Length C: (inch)	21,3	28,3	34,3	35,4
Clamping force (tip - tip) at 3200 psi: (lbf)	2,646	3,307	4,850	4,850
Max load: (lbs)	2,204	3,307	4,409	4,409
Weight: (lbs)	99	218	337	373
Max hydraulic pressure: (psi)	3,200	3,200	3,200	3,200
Fits quick hitch:	S40	S45, S50	S60	S70

## TOOL SYSTEMS FOR INCREASED PROFITABILITY

engcon United States 2666 State Street, Hamden CT 06517

Phone +1 203 691 5920 | Email [northamerica@engcon.com](mailto:northamerica@engcon.com) | Web [www.engcon.com](http://www.engcon.com)